



INFITTING SILL TYPES

(check indicates version shown)

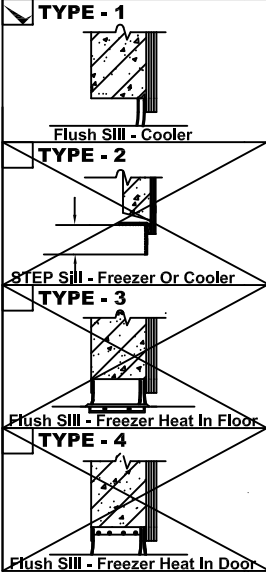

NOTE:
TYPE - 2 REQUIRES DEPTH OF STEP

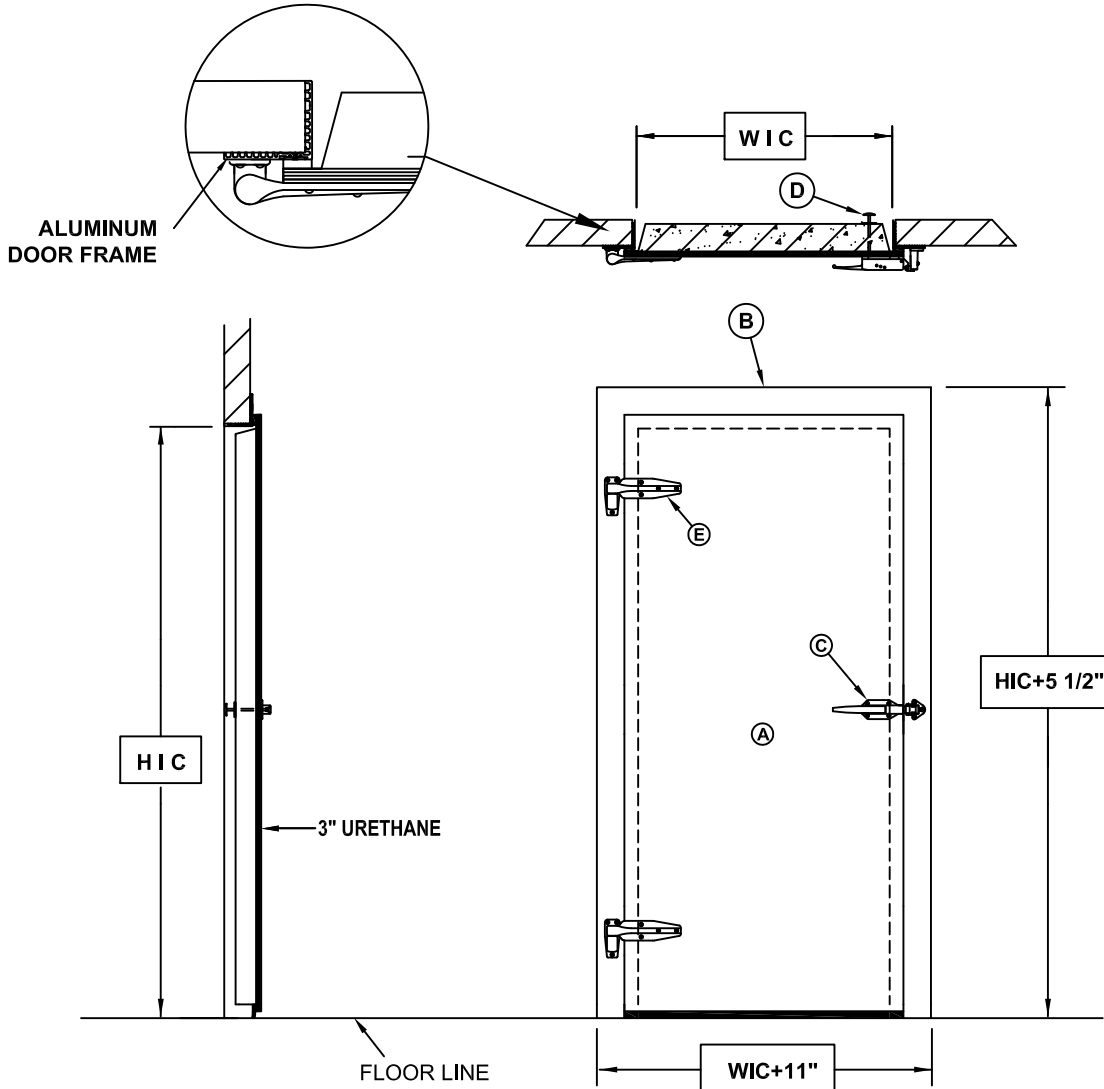

INSTALLATION REQUIREMENTS

- I. Floor under door must be level and smooth
- II. Wall behind face frame must be smooth in a common plane.
- III. Mounting holes 3/4" diameter (drilled in field - by others).

DOOR PANEL AND FRAME

- A. DOOR PANEL
 - 24 GA smooth white
 - 24 GA white stucco embossed
 - 24 GA 304 2B stainless steel
 - OTHER:
- B. FACE FRAME
 - Aluminum
- C. LATCH
 - Padlockable Keyed Cylinder
 - Polished chrome
 - Stainless steel
 - OTHER
- D. INTERIOR RELEASE
 - MUSHROOM BUTTON & Nylon Push Rod (Frost Free)
 - OTHER:
- E. HINGE
 - Cam lift polished chrome
 - Cam lift stainless steel
 - Self closing polished chrome
 - 1277 zinc plate finish
 - OTHER:
- F. FASTENERS
 - THROUGH BOLTS (installed in field - by others)
 - GALV LAG BOLTS (installed in field - by others)
 - OTHER:

OPTIONS

- G. FREEZER DOOR (4" and 6" doors only)
 110V (108 watts, 1 AMP) electric defrost system at four sides of gasket contact area. Separate 110V connection required in field - by others.
- H. INSIDE JAMBS
 Aluminum
- I. MIRROR IMAGE BACKFRAME - steel clad wood
 Wood clad 24ga white stucco embossed
 Wood clad 24 GA 304 2B stainless steel
 Back trim
 OTHER:
- J. DOOR CLOSER
 Door Snubber
- K. KICKPLATES Hingeside Wallside
 Height: 18" 24" 36" 48" OTHER:
 Aluminum diamond tread (1/8" thick)
 18 GA 304 2B stainless steel
 OTHER:
- L. LEADING EDGE CASTER
- M. PILFER PROOF HARDWARE
- N. VISION PANEL
 12" x 14" Insulated
 12" x 14" Heated
 OTHER:

OPERATING TEMPERATURE

DOOR	HINGESIDE	WALLSIDE

REQUIRED FOR PRODUCTION

APPROVED BY: _____ DATE: _____

IMPORTANT:
 Factory may alter door construction and hardware from design illustrated. Factory will not exceed illustrated clearances.

LEFT HINGE TO OPEN - AS SHOWN
RIGHT HINGE - MIRROR IMAGE

FOR:		P.O. #:		DATE:			
JOB:		F.O.#:		TAG:			
DOOR #	QTY	WIDTH IN CLEAR	HEIGHT IN CLEAR	DOOR TYPE	JAMB DEPTH	HINGE LOCATION	SERIAL NUMBER

DRAWN BY: _____ APPROVED BY: _____
 CHECKED BY: _____ LAST REVISION: _____
INFITTING HINGE - ALUMINUM FRAME
COLD STORAGE DOOR
 SINGLE LEAF 3" COOLER
MODEL 540GR

