

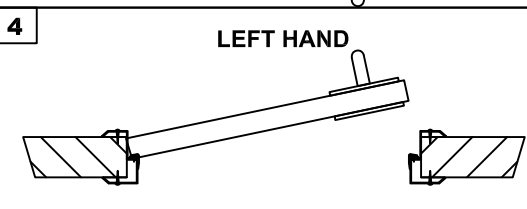
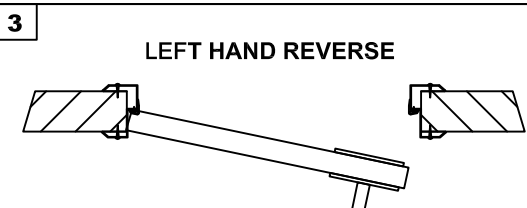
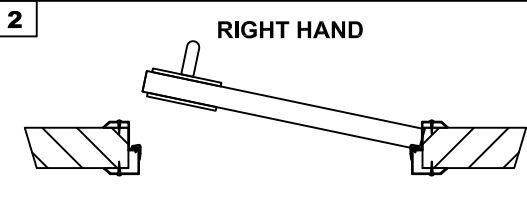
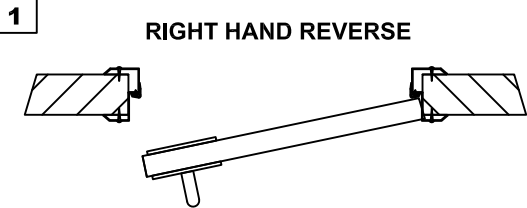
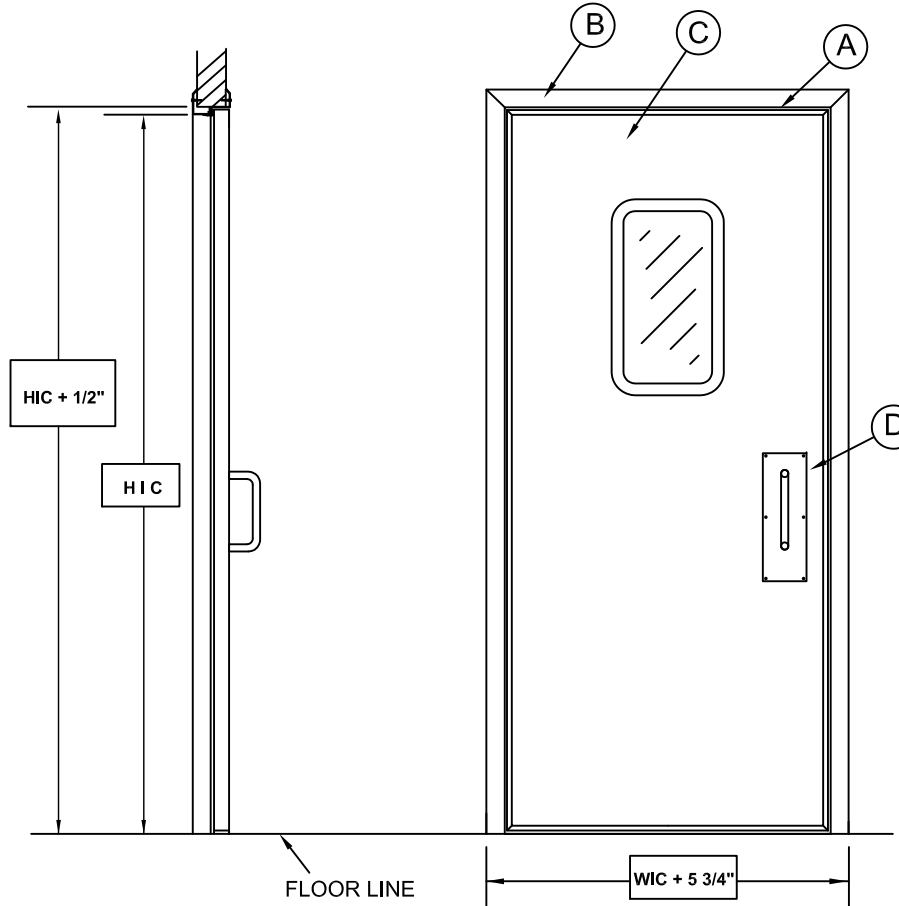


# DOOR HAND

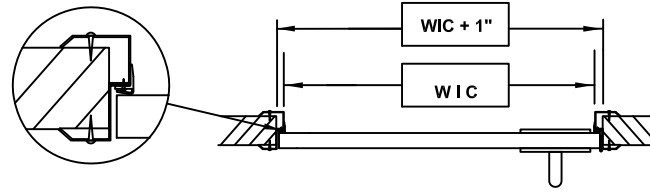

## CONCRETE CURB RECESS

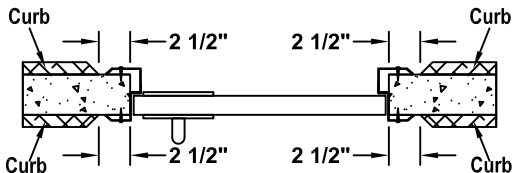

## STANDARD DOOR

- A. DOOR BLADE FRAME - Extruded Aluminium
- B. FRAME - 16Ga 304 2B stainless steel
- C. DOOR BLADE
  - White stucco FRP
  - 24 GA white stucco steel
  - 24 GA white smooth steel
  - 24GA stucco stainless steel

## OPTIONS

- D.  Pull handle - Push plate
- E.  Panic Bar
- F.  Thumb Latch
- G.  Louver
- H.  Electric Strike
- I.  Lever Lock
  - Passage
  - Storeroom
  - Entrance
  - Key Code
  - Privacy
- J.  Window  Lexan  GPW
  - 8" x 24"
  - 12" x 24"- (Standard)
  - 16"x24"
- K.  Door Closer
- L.  KICKPLATES  Inside  Outside
  - Height:  18"  24"  36"  48"  OTHER:
  - Aluminum diamond tread (1/8" thick)
  - 18 GA 304 2B stainless steel
  - OTHER:

LEFT HAND REVERSE SHOWN

APPROVED BY: \_\_\_\_\_ DATE: \_\_\_\_\_

### IMPORTANT:

Factory may alter door construction and hardware from design illustrated. Factory will not exceed illustrated clearances.

Design drawings are for use to verify size, required clearances, and providing confirmation of options requested. Actual production design and components may vary but will not exceed illustrated clearances.

<b>FOR:</b>		<b>P.O. #</b>		<b>DATE:</b>	
<b>JOB:</b>		<b>F.O.#:</b>		<b>TAG #:</b>	
<b>DOOR #</b>	<b>QTY</b>	<b>WIDTH IN CLEAR</b>	<b>HEIGHT IN CLEAR</b>	<b>DOOR THICKNESS</b>	<b>DOOR HAND - SEE ABOVE</b>
					<b>SERIAL NUMBER</b>

DRAWN BY: \_\_\_\_\_ APPROVED BY: \_\_\_\_\_  
 CHECKED BY: \_\_\_\_\_ LAST REVISION: \_\_\_\_\_

SERVICE DOOR  
**PERSONNEL DOOR**  
 SINGLE 1 3/4" LEAF  
**MODEL PS**

